



March 2023 Price List

AIS

PRODUCT INFORMATION

Terms and Conditions 3
 Fabrics, Finishes and Lead Times 5

PANELS

Divi Fast Track Permanent Monolithic Panel Availability Details 6
 Divi Linear Hard Surface Permanent Monolithic Panels 7
 Divi Linear Tackable Surface Permanent Monolithic Panels 8
 Divi Linear Quarter Glass Permanent Monolithic Panels 9

CONNECTORS

Divi Linear Base Raceway Shrouds, Wall Tracks and Wall Mounts 10
 Divi Linear Post Filler Kits 11

ELECTRICAL

Lateral Pass Through Jumpers and Panel-to-Panel Jumpers 12
 Duplex Outlets 13
 Base In-Feeds and Ceiling In-Feeds 14
 Data Plate Kits, Power/Data Pole Kits and Hardwire Junction Boxes 15
 In-Line Power/Data Pole Combination Kits 16
 In-Line Power/Data Pole Retrofit Kits and Pole Dividers 17

TABLES

Height Adjustable Tables and Round Tables 18

WORKSURFACES

Grommet Specifications 19
 Rectangular and Curvilinear Corner Worksurfaces 20
 Divi Bullpen Surfaces 21
 Rectangular Worksurfaces for Height Adjustable Tables 22

SUPPORT

Height Adjustable Table Bases 23
 A-Legs 24
 Divi Panel Mounted A-Legs 24
 N-Legs, Combination Legs and Pedestal-to-Panel Attachment Brackets 25
 Cantilevers, Side Support/Rear Brackets, Flat Plates and U-Channels 26

CLIP SCREENS

Clip Screen Product Details 27
 Glass 1/4" Panel Top Surface Mount Clip Screens 28
 Glass 3/8" Panel Top Surface Mount Clip Screens 29

STORAGE

Mid-Height Shelf and Flipper Doors Units 30
 L Series Pedestals 31
 L Series Laterals and Replacement Pulls 33

ACCESSORIES

Task Lights and Task Light Cord Managers 34
 Monitor Arms 35
 Keyboard Arms, Mouse Trays, Pencil Drawers and Anti-Fatigue Mats 36
 Tackboards, Lock Cores and Keys 37

SEATING

Task Chairs 38
 Side Chairs 39
 Volker Cubes 40

Terms and Conditions

Pricing & Discounts

Pricing is determined by size of order and other criteria. Refer to your Divi Fast Track Pricing Program for complete guidelines.

- Note discount being used.
- The list and net amount of order must be clearly indicated on all purchase orders.
- Account must be in good standing and have no past due balance for purchase order to be accepted.
- If there are any discrepancies on a purchase order, dealer will be required to sign off on final order detail. Signature by dealer constitutes acceptance of new purchase order amount and item details contained therein.

Order Changes & Cancellations

Order changes and cancellations are not allowed with the Fast Track program due to the enhanced lead times.

Order Submission

Orders should be placed electronically through the AIS website using Order Request in DealerNet – <https://dealernet2.ais-inc.com/Orders/Submit>. Any questions on how to submit and track orders should be directed to your Customer Service Representative.

For questions about Divi Fast Track please contact your CSR or email: divifasttrack@ais-inc.com

P.O.'s should clearly state "Divi Fast Track" in subject line and have the electronic file.

Purchase orders must be received by 12:00 PM EST in order for the following day to be considered start of ship date lead time.

All orders must be submitted with a consolidated SP4 or Sif.

Dealer must specify which discount structure they are using- SPIF or no SPIF.

Orders can be tracked online at <https://dealernet2.ais-inc.com/Requests/>

Payment Terms

A signed purchase order is required for all orders, unless waived by an officer of Affordable Interior Systems, Inc. (AIS). First time orders require a 50% deposit, unless waived by an officer of Affordable Interior Systems, Inc. (AIS). With approved credit, all balances are due within 30 days of invoice date.

Credit

Three trade references (including bank and account number) are required. All accounts with balances beyond 30 days of invoice date will be put on credit hold until the balance is paid in full.

Acknowledgments

Every order is acknowledged via e-mail. Dealer must sign the acknowledgment and return to Customer Service within 24 hours. Orders will be manufactured and invoiced based upon the information on the acknowledgment. If there is any discrepancy, please notify AIS immediately. Orders are accepted by AIS per terms on the acknowledgment. Note order is in production when acknowledgment sent.

If you do not want the merchandise earlier than the specified date, please write "Do not ship for arrival before _____" on your purchase order.

Add On Orders

Add on orders are allowed within 30 days to receive the same discount. Actual freight applies. Please contact Customer Service for a freight code. Must be Divi Fast Track product to receive add-on discount.

Sales Tax

Affordable Interior Systems, Inc. is registered with multiple states. In this case, we are required by law to collect and remit sales tax to the states in which we are registered. Please download and complete the Multi-Jurisdictional Sales Tax Exemption Form from our website for all states which your company has a valid resale tax exemption certificate. Fax a completed form to our Accounting Department at (978) 562-0811. Multi-Jurisdictional Sales Tax Exemption Forms are available on DealerNet.

Freight Policy

FOB origin, freight pre-paid. Delivery includes standard Monday through Friday 7am to 5pm deliveries.

Tracking Shipments

You will receive an email confirmation once your order has shipped that includes the following information: carrier, contact information and shipping reference number. AIS strongly encourages you to contact the carrier in order to track your shipments closely for an estimated delivery date.

Guaranteed Deliveries

AIS will gladly accept requests for delivery times and for drop shipments to job sites on full truckload shipments. AIS is not able to guarantee specific delivery times for any less than truckload (LTL) shipments. Please contact AIS Customer Service if you require delivery on a specific day during standard business hours and for a non-rushed shipment. We offer a guaranteed two hour window receipt on full truckload shipments for \$250 for one truckload, or two or more truckloads for \$500 during standard business hours. Your CSR must be notified a week prior to your ship date otherwise additional fees may apply. After-hours, holiday and weekend shipments may be arranged for an additional charge on full truckload shipments. Please contact AIS Customer Service for those rates. Please note that in the case of a missed guaranteed shipment the carrier is only liable for that additional charge, not for labor or other damages.

Call Before Deliveries

You may arrange a delivery with the carrier by noting "Call Before Delivery" on your order, which will typically delay receipt of the product to you by about one day. You cannot add a call before delivery on a truckload shipment if you also have a guaranteed delivery arranged. Please note that call before deliveries are estimates only and should not be used when shipping direct to a job site. AIS is not responsible for any damages incurred for any late deliveries, including labor or any other charges resulting from unforeseen delays by any AIS or dealer chosen carrier. AIS strongly urges dealers to take into consideration the risk that carriers typically allow for a 2 day delivery range.

Consolidating Orders

AIS acknowledges orders with a two day ship date range. We are committed to shipping your products within that acknowledged range. Shipments may be combined and consolidated in order to create a full truckload shipment. Shipments may also be hand loaded in order to avoid LTL spillover. Full truckload shipments have less variable transit times as well as significantly less freight damage. Our goal is always to provide you with the best possible delivery service. Transportation efforts are managed as part of an ongoing effort to improve AIS's transportation efficiency thereby saving fuel, reducing emissions, and reducing air pollution associated with AIS's transportation activities.

Please note:

Dealer may incur additional carrier Accessorial Fees if not specified and quoted at the time of order for the following, which may include but are not limited to:

- No loading dock
- Redirect of product
- Refusal of product
- Storage
- Special truck size (standard is 53" trailer)
- Street unloads
- Lift gate requirement
- Detention charges after 2 hours of unload time for TL and 30 minutes for LTL

Terms and Conditions

Deductions

Deductions from invoices are not allowed, for any reason, without authorization from AIS.

Delay of Shipment

Acceptance of AIS acknowledgment confirms order ship date. If dealer requests delay of shipment for any period greater than one day from scheduled ship date, storage fees will be assessed. Dealer must submit purchase order for estimated storage costs.

Freight Claims

AIS will file freight claims for loss or damage if policy is followed. In order to make this policy maintainable, certain requirements must be met by the consignee in accordance with freight laws and carrier policies. These requirements are as follows:

All damage or lost freight should be reported to AIS within 72 hours of receipt. In the case of obvious damage, it must be noted in short detail on delivery receipt (i.e. scratched surfaces, dented cartons, missing pieces).

If missing or damaged freight is discovered after receipt is completed, consignee must notify Carrier or AIS within 72 hours and request a corrected delivery receipt acknowledging loss or damage.

A detailed list of missing or damaged pieces is required in order to assess the value of the claim. Upon receipt of this information, AIS will contact the carrier and request an inspection or waiver thereof.

In the case of concealed damage, AIS must be informed within 10 days of receipt of product. All damaged product and packaging must be preserved as received pending an inspection or waiver of inspection by the carrier. All product that has a claim pending against it must be available for carriers to salvage once the claim is paid.

It is highly encouraged that digital photos are taken of any suspected freight damage. Photographic evidence substantiating claims should be provided electronically to AIS.

Any failure to adhere to these policies and procedures will result in claim responsibility shifting from AIS to the consignee.

Force Majeure

Seller shall not be liable for failure to perform or for delay in performance due to fire, flood, strike, or any other labor difficulty, act of God, act of any governmental authority or of the Purchaser, riot, embargo, fuel or energy shortage, wrecks or delay in transportation, inability to obtain necessary labor, materials, or manufacturing facilities from usual sources or failure of suppliers to meet their contractual obligations or due to any cause beyond its reasonable control. In the event of delay in performance due to any such cause, Seller reserves the right to extend the date of delivery or time for completion by a period of time reasonably necessary to overcome the effect of such delay, to allocate any available supply of goods in a manner it deems reasonable, or to cancel any purchase order.

Liability

Seller, its contractors, authorized dealers and subcontractors or suppliers of any tier shall not be liable in contract, in tort (including negligence and/or strict liability) or otherwise for any special, indirect, incidental or consequential damages whatsoever, including, without limitations, damages or loss of other property or equipment, loss of profits or revenue or loss of use of equipment (including additional expenses incurred in using existing facilities). The remedies set forth herein are exclusive, and the liability of Seller with respect to any contract or anything done in connection therewith, such as the performance or breach thereof, or from the manufacture, sale, delivery, resale or use of any Product covered by or furnished under the order, whether in contract, in tort (including negligence and/or strict liability) or otherwise shall not exceed the price of the Product or part on which such liability is based.

Local Codes

Seller considers its product to be office furniture and subject to all applicable local fire, electrical and building codes. Since local codes may vary, the purchaser is responsible for the proper application and installation of AIS product in accordance

with the requirements of these local codes. Engineering, research and testing have been conducted to have electrical components of AIS products conform to national electrical codes. Only Underwriters Laboratories (UL) tested and approved electrical components are used in electrical devices. See www.UL.com for complete UL listing information. In addition, all panels and components used by AIS have been UL approved. Seller shall not be responsible for any damages or expenses resulting from Purchaser's specifications not conforming to the requirements of the law or local building codes, unless it specifically agrees in writing to do so. Since Seller has no control over the use to which others may put its Products, each user or specifier should determine the Products' suitability for the particular application.

Limited Lifetime Warranty

This warranty is given to the initial purchaser and is valid for as long as the product is owned by the original Buyer. The warranty, which runs from the date of manufacture, covers defects in materials and craftsmanship found during normal usage of the products during the warranty period. If a product is defective, and if written notice of the defect is given to AIS within the applicable warranty period, AIS (at its option) will either repair or replace the defective product with a comparable component or product. The limited lifetime warranty applies to all products regardless of the numbers of shifts the product is used each day except as noted below.

Applicable Warranty Period	Products / Restrictions
Lifetime (as defined below)	All AIS branded products (except as noted below)
Ten (10) Years	Electrical products (including Height Adjustable Tables)
Five (5) Years	Moving parts, which include keyboard mechanisms, locks, suspensions, height adjustable table mechanisms, casters as well as all AIS fabrics / upholstery.
Five (5) Years	Calibrate Laminate Storage / Casegoods, Casegood cushions (with upholstery fabric)

This warranty does not apply to "normal wear and tear", damage caused by carrier, damage caused by transport of product from one site or location to another, alterations to the product not expressly authorized by Seller, and products considered to be of a consumable nature such as bulbs and light ballast. It also does not apply to "customer's own material" (i.e. material specified by Buyer that is not a standard AIS product offering) used in the manufacture of AIS products. A product will not be considered defective, and Seller will not be obligated to replace it, if the product is not installed properly or is used in a "non-standard" fashion as prescribed by AIS. It is at the sole discretion of AIS to make a determination if a defect is due to improper product installation.

This warranty is presented in lieu of all other warranties, express or implied, including, but not limited to, any implied warranties of merchantability of fitness for a particular purpose. The customers exclusive remedy with respect to any and all losses or damages resulting from any cause whatsoever shall be repair or replacement as specified above.

Seller (AIS) shall not be liable under any circumstances for consequential, economic, or incidental damages of any nature, including without limitation, damages for personal injury or damages to property, and however occasioned, whether alleged as resulting from breach of warranty or contract by AIS or negligence of AIS or otherwise.

International warranties may differ.

AIS Supported Specification Software

AIS provides (at no cost) symbols and data libraries for the following applications. Only Authorized AIS Dealers may purchase AIS products. AIS supported software libraries are:

- 20-20 GIZA
- 20-20 CAP
- Project Matrix

DIVI FAST TRACK FINISH OPTIONS

Vertical Surface Fabrics

Name	Grade
Avenue	A
Cape Cod	A
Engage	A
Mirador	A
New England	A
Rainfall	A
Simplicity	A
Twizzle	A

Laminate Options

Name	Grade
Absolute Acajou [†]	A
Aimtoo Savatre	A
Looks Likatre [†]	A
Maritime Dune [†]	A
Midwest Maple	A
Summer Drops	A
True White	A
Trytoo Savatre [†]	A
White Chocolate [†]	A

Upholstery Fabric Options*

Name	Grade
Mirador	A

Mirador comes standard as an antimicrobial upholstery.
 *Available on ped cushions and Volker Cubes only.

[†]Indicates a textured laminate.

2MM Edgeband Options

Name	Grade
Absolute Acajou	A
Aimtoo Savatre	A
Black	A
Grey Value 1	A
Looks Likatre	A
Maritime Dune	A
Medium Tone	A
Midwest Maple	A
Satin White	A
Summer Drops	A
True White	A
Trytoo Savatre	A
White Chocolate	A

Divi Trim, Base, Storage and X-Base Paint Finish Options

Name	Color Code	Divi Panel Grade	Divi Base Grade
Black	BK	A	A
Grey Value 1	GV1	A	A
Medium Tone	MT	A	A
Satin White	SW	A	A

Height Adjustable Table Paint Finish Options

Day-to-Day Base Options

Name	Grade
Black	A
Metallic Silver	A
Satin White	A

E Series Base Options

Name	Grade
Metallic Silver	A

Glass Finish Options

Name	Grade
Clear	A

Lead Time

See Lead Time Guide on DealerNet for current lead times.

Lead time does not include 24-hour order processing period.

Orders missing part numbers and corresponding required finish information are considered incomplete. These orders will not be processed until correct information is received.

Lead time begins 24 hours after receipt of complete and processable order as defined in the purchase order requirement section of this program.


Lead time for orders containing non-program items may vary. AIS Customer Service can assist in clarifying mixed order lead time.

Blended orders will have lead times assigned per items on actual order.

Divi Fast Track Permanent Monolithic Panel Availability Details

Permanent Monolithic Panel Availability

Fabric Covered - Hard Surface - Powered/Non-Powered:

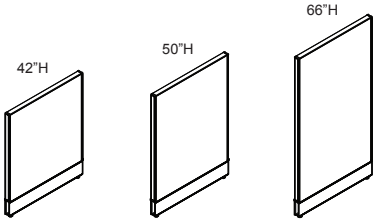


Nominal Heights:

42", 50", 66" (Actual Min. Height = Nominal - 1/16") - 1 1/2" Leveling Glide Range

Widths:

24", 30", 36", 42", 48", 60" (Actual Width = Nominal + 1/8")

Fabric Covered - Tackable Surface - Powered/Non-Powered:




Nominal Heights:

50", 66" (Actual Min. Height = Nominal - 1/16") - 1 1/2" Leveling Glide Range

Widths:

24", 30", 36", 42", 48", 60" (Actual Width = Nominal + 1/8")

Quarter Glass - Fabric Covered Hard Surface - Powered/Non-Powered:




Nominal Heights:

50", 66" (Actual Min. Height = Nominal - 1/16") - 1 1/2" Leveling Glide Range

Widths:

24", 30", 36", 42", 48" (Actual Width = Nominal + 1/8")


Permanent Monolithic Panel Profile



Duplex outlets are ordered separately. Two outlets can be used per side, four total per panel. Outlets utilize top base cover holes.

Duplex outlet covers hide unused duplex outlet or data locations. Six are shipped with every panel. A 24"W gets three duplex outlet covers. Order extra as needed.

Snap-in data jack housing (order separately) accommodates six Hubbell or compatible data/voice jacks. Snap-in housings may not be used back to back on a spine wall.



Data cable raceway cavity is approximately 2" wide by 3" tall and can accommodate between 32 and 40 Cat 6 data cables, depending on how tightly they are packed.

Cat 5 and 6 data jacks extend beyond center line of raceway, preventing jack housings to be used back to back on a spine. Plan on using "cross corners" on panel to eliminate this issue.


Divi Linear Hard Surface Permanent Monolithic Panels

DIVI LINEAR HARD SURFACE PERMANENT MONOLITHIC NON-POWERED PANELS


H	W	Model Number	List
42	24	P-DLFRPM4224	648
42	30	P-DLFRPM4230	702
42	36	P-DLFRPM4236	749
42	42	P-DLFRPM4242	795
42	48	P-DLFRPM4248	841
42	60	P-DLFRPM4260	1,007
50	24	P-DLFRPM5024	696
50	30	P-DLFRPM5030	773
50	36	P-DLFRPM5036	846
50	42	P-DLFRPM5042	924
50	48	P-DLFRPM5048	1,006
50	60	P-DLFRPM5060	1,196
66	24	P-DLFRPM6624	801
66	30	P-DLFRPM6630	886
66	36	P-DLFRPM6636	962
66	42	P-DLFRPM6642	1,043
66	48	P-DLFRPM6648	1,122
66	60	P-DLFRPM6660	1,344

DIVI LINEAR HARD SURFACE PERMANENT MONOLITHIC POWERED PANELS

H	W	Model Number	List
42	24	P-DLFPPM4224	996
42	30	P-DLFPPM4230	1,048
42	36	P-DLFPPM4236	1,090
42	42	P-DLFPPM4242	1,133
42	48	P-DLFPPM4248	1,184
42	60	P-DLFPPM4260	1,342
50	24	P-DLFPPM5024	1,045
50	30	P-DLFPPM5030	1,115
50	36	P-DLFPPM5036	1,187
50	42	P-DLFPPM5042	1,263
50	48	P-DLFPPM5048	1,342
50	60	P-DLFPPM5060	1,527
66	24	P-DLFPPM6624	1,141
66	30	P-DLFPPM6630	1,223
66	36	P-DLFPPM6636	1,311
66	42	P-DLFPPM6642	1,380
66	48	P-DLFPPM6648	1,461
66	60	P-DLFPPM6660	1,672



Divi Linear Trim



Divi Linear Trim

Specify

Notes

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Color Selection for Base Cover
- Raceway Divider Option (+50)
- Data Access Option (+15)
- Permanent Monolithic Non-Powered Panels - Hard Surface are fabric covered hard surface panels.
- Panels may be ordered with power/data access base covers and/or raceway divider.
- Each panel includes all connection hinges needed for each panel.
- Features Divi Linear trim.

Specify

Notes

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Color Selection for Base Cover
- Raceway Divider Option (+50)
- Permanent Monolithic Powered Panels - Hard Surface are fabric covered hard surface panels.
- Includes 8 wire 4 circuit powerway and power/data access base covers.
- Panels may be ordered with a raceway divider.
- Includes six duplex outlet hole covers; 24"W panels only include three duplex outlet hole covers.
- Each panel includes all connection hinges needed for each panel.
- Duplex outlets and electrical jumpers are specified separately. See "Electrical".
- Features Divi Linear trim.


Divi Linear Tackable Surface Permanent Monolithic Panels

**DIVI LINEAR TACKABLE SURFACE PERMANENT MONOLITHIC
NON-POWERED PANELS**


H	W	Model Number	List
50	24	P-DLTRPM5024	846
50	30	P-DLTRPM5030	867
50	36	P-DLTRPM5036	969
50	42	P-DLTRPM5042	1,036
50	48	P-DLTRPM5048	1,102
50	60	P-DLTRPM5060	1,313
66	24	P-DLTRPM6624	956
66	30	P-DLTRPM6630	1,022
66	36	P-DLTRPM6636	1,096
66	42	P-DLTRPM6642	1,166
66	48	P-DLTRPM6648	1,237
66	60	P-DLTRPM6660	1,452

**DIVI LINEAR TACKABLE SURFACE PERMANENT MONOLITHIC
POWERED PANELS**

H	W	Model Number	List
50	24	P-DLTPPM5024	1,223
50	30	P-DLTPPM5030	1,277
50	36	P-DLTPPM5036	1,342
50	42	P-DLTPPM5042	1,412
50	48	P-DLTPPM5048	1,474
50	60	P-DLTPPM5060	1,690
66	24	P-DLTPPM6624	1,314
66	30	P-DLTPPM6630	1,383
66	36	P-DLTPPM6636	1,452
66	42	P-DLTPPM6642	1,522
66	48	P-DLTPPM6648	1,593
66	60	P-DLTPPM6660	1,808



Divi Linear Trim



Divi Linear Trim

Specify	Notes
<ul style="list-style-type: none"> • Fabric Selection for Side A and B • Paint Selection for Panel Trim • Color Selection for Base Cover • Raceway Divider Option (+50) • Data Access Option (+15) 	<ul style="list-style-type: none"> • Permanent Monolithic Non-Powered Panels - Tackable Surface are fabric covered, sound absorbing tackable panels. • Panels may be ordered with power/data access base covers and/or raceway divider. • Each panel includes all connection hinges needed for each panel. • Features Divi Linear trim.

Specify	Notes
<ul style="list-style-type: none"> • Fabric Selection for Side A and B • Paint Selection for Panel Trim • Color Selection for Base Cover • Raceway Divider Option (+50) 	<ul style="list-style-type: none"> • Permanent Monolithic Powered Panels - Tackable Surface are fabric covered, sound absorbing tackable panels. • Includes 8 wire 4 circuit powerway and power/data access base covers. • Panels may be ordered with a raceway divider. • Includes six duplex outlet hole covers; 24"W panels only include three duplex outlet hole covers. • Each panel includes all connection hinges needed for each panel. • Duplex outlets and electrical jumpers are specified separately. See "Electrical". • Features Divi Linear trim.



Divi Linear Quarter Glass Permanent Monolithic Panels

DIVI LINEAR QUARTER GLASS PERMANENT MONOLITHIC NON-POWERED PANELS



H	W	Model Number	List
50	24	P-DLQGWPRM5024	1,349
50	30	P-DLQGWPRM5030	1,478
50	36	P-DLQGWPRM5036	1,612
50	42	P-DLQGWPRM5042	1,743
50	48	P-DLQGWPRM5048	1,871
50	60	P-DLQGWPRM5060	2,121
66	24	P-DLQGWPRM6624	1,554
66	30	P-DLQGWPRM6630	1,718
66	36	P-DLQGWPRM6636	1,882
66	42	P-DLQGWPRM6642	2,046
66	48	P-DLQGWPRM6648	2,207
66	60	P-DLQGWPRM6660	2,532

DIVI LINEAR QUARTER GLASS PERMANENT MONOLITHIC POWERED PANELS

H	W	Model Number	List
50	24	P-DLQGWPPM5024	1,631
50	30	P-DLQGWPPM5030	1,772
50	36	P-DLQGWPPM5036	1,908
50	42	P-DLQGWPPM5042	2,038
50	48	P-DLQGWPPM5048	2,171
50	60	P-DLQGWPPM5060	2,436
66	24	P-DLQGWPPM6624	1,853
66	30	P-DLQGWPPM6630	2,022
66	36	P-DLQGWPPM6636	2,186
66	42	P-DLQGWPPM6642	2,356
66	48	P-DLQGWPPM6648	2,523
66	60	P-DLQGWPPM6660	2,856



Divi Linear Trim



Divi Linear Trim


Specify	Notes
<ul style="list-style-type: none"> • Style Selection for Glass Insert • Fabric Selection for Side A and B • Paint Selection for Panel Trim • Color Selection for Base Cover • Raceway Divider Option (+50) • Data Access Option (+15) 	<ul style="list-style-type: none"> • Permanent Monolithic Non-Powered Quarter Glass Panels are fabric covered hard surface panels with an aluminum wrapped glass insert at the top section of the panel. • Panels may be ordered with power/data access base covers and/or raceway divider. • Each panel includes all connection hinges needed for each panel. • 33" fabric height for 50" high panels, 49" fabric height for 66" high panels, 65" fabric height for 82" high panels. • Features Divi Linear trim.

Specify	Notes
<ul style="list-style-type: none"> • Style Selection for Glass Insert • Fabric Selection for Side A and B • Paint Selection for Panel Trim • Color Selection for Base Cover • Raceway Divider Option (+50) 	<ul style="list-style-type: none"> • Permanent Monolithic Quarter Glass Powered Panels are fabric covered hard surface panels with an aluminum wrapped glass insert at the top section of the panel. • Includes 8 wire 4 circuit powerway and power/data access base covers. • Panels may be ordered with a raceway divider. • Includes six duplex outlet hole covers; 24"W panels only include three duplex outlet hole covers. • Each panel includes all connection hinges needed for each panel. • Duplex outlets and electrical jumpers are specified separately. See "Electrical". • 33" fabric height for 50" high panels, 49" fabric height for 66" high panels, 65" fabric height for 82" high panels. • Features Divi Linear trim.

Divi Linear Base Raceway Shrouds, Wall Tracks and Wall Mounts



DIVI LINEAR 90° 2-WAY BASE RACEWAY SHROUDS

Model Number	List	Raceway Divider
P-DLBS90	26	+8





DIVI LINEAR 90° 3-WAY BASE RACEWAY SHROUDS

Model Number	List	Raceway Divider
P-DLBS3W	26	+8



DIVI LINEAR END BASE RACEWAY SHROUDS

Model Number	List
P-DLSEOR	26



Specify


- Color Selection for Shroud Cover
- Raceway Divider Option

Notes

- Base Raceway Shrouds are required to trim base raceways in order to cover data/electrical cable exposure.
- 90° 2-Way Base Raceway Shrouds are required to trim base raceways at 90° panel connections.
- 90° 3-Way Base Raceway Shrouds are required to trim base raceways at 90° 3-way panel connections.
- End Base Raceway Shrouds are required to trim base raceways at the end of panel runs.

WALL TRACKS

H	Model Number	List
60	A-WTRK60	179



Specify


- Paint Selection

Notes

- Wall Track mounts to fixed walls to provide slotted channel for panel hung items.
- Track will sit approximately 5" off floor when leveled with top of panels to accommodate wall cover base.
- Hardware for mounting wall track to walls is not included.
- Wall track may not be shared between shelf units or flipper door units.
- Two sticks of Wall Track are required for each unit being mounted.

DIVI LINEAR WALL MOUNT KITS

H	Model Number	List
42	P-DLWMKIT42	108
50	P-DLWMKIT50	121
66	P-DLWMKIT66	158



Specify

- Paint Selection


Notes

- Wall Mount Kits mount panel perpendicular to fixed wall.
- Specify according to the height of the panel to be mounted.
- Wall mount hardware to attach wall mount to wall is not included.
- Includes hinges.

Divi Linear Post Filler Kits


DIVI LINEAR 2-WAY POST FILLER

Panel H	Model Number	List
42	P-DLPP242	343
50	P-DLPP250	350
58	P-DLPP258	359
66	P-DLPP266	366
82	P-DLPP282	432
98	P-DLPP298	497

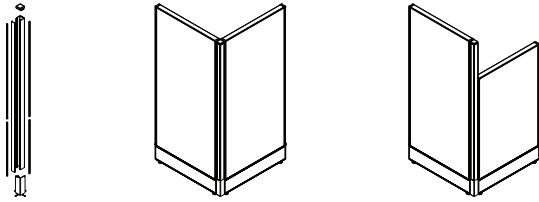


DIVI LINEAR 3-WAY POST FILLER

Panel H	Model Number	List
42	P-DLPP342	310
50	P-DLPP350	332
58	P-DLPP358	343
66	P-DLPP366	353
82	P-DLPP382	417
98	P-DLPP398	476

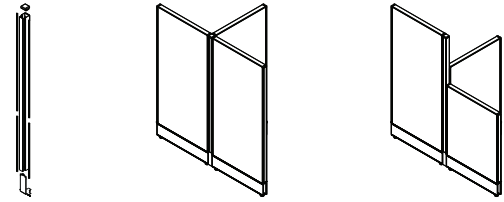


DIVI LINEAR 4-WAY POST FILLER

Panel H	Model Number	List
42	P-DLPP442	155
50	P-DLPP450	173
58	P-DLPP458	183
66	P-DLPP466	193
82	P-DLPP482	254
98	P-DLPP498	313

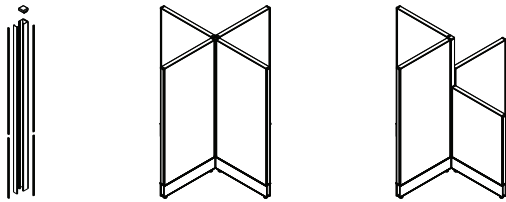

DIVI LINEAR END OF RUN POST FILLER

Panel H	Model Number	List
42	P-DLPFE42	319
50	P-DLPFE50	326
58	P-DLPFE58	341
66	P-DLPFE66	349
82	P-DLPFE82	407
98	P-DLPFE98	466



Specify

- Paint Selection


Notes

- Post Fillers can be used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles or simply as an aesthetic piece.
- 2-way, 3-way, and end or run fillers include a base shroud.
- Post fillers are not needed for panel connection, stability, or structural integrity.
- Specify the height which corresponds to the tallest panel in the configuration.
- Available painted only.

Lateral Pass Through Jumpers and Panel-to-Panel Jumpers

LATERAL PASS THROUGH JUMPERS

Panel W	Actual L	Model Number	List
24	43	E-MW8W4PJ24	303
30	48	E-MW8W4PJ30	324
36	55	E-MW8W4PJ36	334
42	61	E-MW8W4PJ42	345
48	67	E-MW8W4PJ48	372
60	79	E-MW8W4PJ60	400




Notes

- Lateral Pass Through Jumpers pass through a non-powered panel to connect two powered panels.
- Specify the jumper that corresponds to the width of the panel to be passed through.

EXTENDED LATERAL PASS THROUGH JUMPERS

Panel W	Actual L	Model Number	List
24	45	E-MW8W4PJ24E	315
30	51	E-MW8W4PJ30E	331
36	57	E-MW8W4PJ36E	342
42	63	E-MW8W4PJ42E	351
48	69	E-MW8W4PJ48E	382
60	81	E-MW8W4PJ60E	421




Notes

- Lateral Pass Through Jumpers pass through a non-powered panel to connect two powered panels.
- Specify the jumper that corresponds to the width of the panel to be passed through.

PANEL-TO-PANEL JUMPERS

L	Type	Model Number	List
18	Standard	E-MX8W4PTPC18	212
21	Extended	E-MX8W4PTPC21	222




Notes

- Panel-to-Panel Jumper connects any two adjacent powered panels connected in a straight line or at an angle.
- Order an Extended Panel-to-Panel Jumper to connect any two powered panels across the gap created by a 3-way or 4-way connection.
- 90°, 120° and 135° corners and straight panel-to-panel connections do not require an extended jumper.

Duplex Outlets


DUPLEX OUTLETS

Line	Model Number	List
1	E-MW8W4DO1	78
2	E-MW8W4DO2	78
3	E-MW8W4DO3	78
4	E-MW8W4DO4	78



CALIFORNIA TITLE 24 CONTROLLED DUPLEX OUTLETS

Line	Model Number	List
1	E-MW8W4T24DO1	90
2	E-MW8W4T24DO2	90
3	E-MW8W4T24DO3	90
4	E-MW8W4T24DO4	90



Notes


- Duplex Outlets are available at designated circuits 1 through 4.
- Each duplex outlet contains two single receptacles (places to plug into) of the same circuit and are specified separately from powerways.
- All duplex outlets have black faces.
- The lettering on outlets for Circuit 1, 2 and 3 is white. The lettering on outlets for Circuit 4 is orange.
- Outlets are screw mounted to powerway.
- Duplex outlets are standard 15 amp outlets.

Notes

- In California, 50 percent of all outlets in a systems panel cluster or benching cluster, for new construction, MUST be controlled outlets, even if there is no task lighting.
- Customers should plan on using circuits 2 and 3 for controlled circuits, and plan general load for all other items on circuits 1 and 4.
- If using 2 + 2 configuration, controlled circuits should be 1 and 2, and general load circuits on 4 and 5.
- Outlets must have the “controlled” symbol for identification purposes.

DUPLEX OUTLET HOLE COVERS

Model Number	List
E-UNWC	30




Notes

- Duplex Outlet Hole Covers are supplied with each powered panel to cover unused duplex outlet locations (six).
- 24”W panels only include three duplex outlet hole covers.
- Order extra hole covers separately only when required.

Base In-Feeds and Ceiling In-Feeds



SIDE MOUNTED BASE IN-FEEDS

Length	Model Number	List
72	E-UN8W4BIFS	493



NEW YORK CITY SIDE MOUNTED BASE IN-FEEDS

Length	Model Number	List
72	E-HM8W4BIFSNY	980




Notes

- Side Mounted Base In-Feeds provide interface with building power at the base of the panel and mounts to powerway at jumper location.
- Each base in-feed is 6' in length, encased in "liquid tight".
- New York City code requires the use of a special base feed with an in-line junction box.



RECEPTACLE MOUNT BASE IN-FEEDS

Length	Hand	Model Number	List
72	Left	E-UN8W4BIFL	529
72	Right	E-UN8W4BIFR	529



NEW YORK CITY RECEPTACLE MOUNT BASE IN-FEEDS

Length	Hand	Model Number	List
72	Left	E-HM8W4BIFLNY	1,028
72	Right	E-HM8W4BIFRNY	1,028



Notes

- Receptacle Mounted Base In-Feeds provide interface with building power and mounts to powerway at duplex outlet location.
- Each base in-feed is 6' in length, encased in "liquid tight".
- Note: New York City code requires the use of a special base feed with an in-line junction box.

CEILING IN-FEEDS

Length	Model Number	List
144	E-UN8W4CIF	577




Notes

- Ceiling In-Feeds provide interface with building power from a suspended ceiling through a power pole shell.
- Each ceiling feed is 12' long.
- Power pole shells are ordered separately.
- Power/Data Pole Kits are sold and specified separately.

Data Plate Kits, Power/Data Pole Kits and Hardwire Junction Boxes

DATA PLATE KITS

Item	Model Number	List
6 Port Data Gang Plate	E-DP6GFPB	35
CAT 5e Jack	E-HRJ45-SM	123
CAT 6 Data Jack	E-HXJ6BK-SM	134
Hole Blank (10PK)	E-SFBB10-SM	83




Notes

- Snap-In Data Housing Plate for Hubbell Premise™ has six ports.
- Housing is black and snaps into standard AIS DiVi duplex outlet holes, which measure 1.86" x 3.012".
- Note: RJ-45 jacks can be used in place of RJ-11 jacks.

DOUBLE CHANNEL POWER/DATA POLE KIT

Model Number	List
A-PPDV	753



Specify


- Paint Selection

Notes

- Power/Data Pole Kit includes two 68" pole sections, two 68" covers, one pole coupler, two 68" dividers, four pole to panel mounting brackets, one ceiling shroud, one 72" perforated metal strip for attaching pole to ceiling grid, and mounting hardware.
- Order ceiling feeds separately.
- Designed for an 11' ceiling.
- For use at 2-way and 3-way locations only.

HARDWIRE JUNCTION BOX

Model Number	List
E-DVJBCH	472




Notes

- Hardwire Junction Box allows standard, hard wired, single gang duplex outlets to be used in DiVi panels at each standard, modular duplex outlet location.
- Each outlet will require one junction box, and outlets cannot be placed back to back on a spine.
- Junction boxes do not include electrical connectors.
- Boxes are UL listed.
- Decora faced outlets cannot be used.
- Kit includes all hardware required to attach box to DiVi panel at duplex outlet location.
- Standard DiVi powered base covers are required. Order DiVi panels with standard powered base cover option.
- Boxes have standard 0.875" knockouts for electrical connectors.
- Kit includes one low profile metal face plate painted per specification.
- Junction boxes can be used with either 15 amp or 20 amp single gang outlets.
- Box is 3"H x 1.524"W x 7"L.

In-Line Power/Data Pole Combination Kits


2-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP242	858
50	P-DLPFPP250	860
58	P-DLPFPP258	847
66	P-DLPFPP266	841
82	P-DLPFPP282	845
98	P-DLPFPP298	850




3-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP342	844
50	P-DLPFPP350	845
58	P-DLPFPP358	837
66	P-DLPFPP366	828
82	P-DLPFPP382	833
98	P-DLPFPP398	835



4-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP442	692
50	P-DLPFPP450	693
58	P-DLPFPP458	684
66	P-DLPFPP466	675
82	P-DLPFPP482	679
98	P-DLPFPP498	675



END OF RUN IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPPE42	858
50	P-DLPFPPE50	860
58	P-DLPFPPE58	847
66	P-DLPFPPE66	841
82	P-DLPFPPE82	839
98	P-DLPFPPE98	850



Specify

- Paint Selection

Notes

- In-Line Power/Data Pole Combination Kits (1.619”d x 1.860”w) include one in-line power/data pole kit and one post filler kit.
- 2-way, 3-way, and end or run kits include a base shroud.
- Specify the height which corresponds to the tallest panel in the configuration.
- Available painted only.
- Designed for an 11’ ceiling.

In-Line Power/Data Pole Retrofit Kits and Pole Dividers

IN-LINE POWER/DATA POLE RETROFIT KITS

Panel H	Model Number	List
42	P-DLPFPP42	543
50	P-DLPFPP50	538
58	P-DLPFPP58	515
66	P-DLPFPP66	502
82	P-DLPFPP82	470
98	P-DLPFPP98	410



IN-LINE POWER/DATA POLE DIVIDER

Panel H	Model Number	List
42	P-DVPFPPD42	276
50	P-DVPFPPD50	281
58	P-DVPFPPD58	280
66	P-DVPFPPD66	283
82	P-DVPFPPD82	286
98	P-DVPFPPD98	295



Specify

- Paint Selection

Notes

- In-Line Power/Data Pole Retrofit Kit (1.619”d x 1.860”w) mounts to the top of post fillers which are already installed at 2-way, 3-way, or 4-way connections.
- Specify the height which corresponds to the tallest panel in the configuration.
- Available painted only.
- Does not include post filler.
- Designed for an 11’ ceiling.
- Channel can accommodate 52 Cat 5 cables or 46 Cat 6 cables or 36 Cat 5 cables or 32 Cat 6 cables in tandem with a ceiling infeed.


Notes

- In-Line Power/Data Pole Divider is specified when electrical cables need to be segregated from data cables by a metal barrier.

Height Adjustable Tables and Round Tables

DAY-TO-DAY 2MM EDGE RECTANGULAR TABLES WITH HEIGHT ADJUSTABLE BASES


D	W	H	Model Number	List
24	42	29	T-RCR244229HLG2	3,058
24	48	29	T-RCR244829HLG2	3,209
24	54	29	T-RCR245429HLG2	3,265
24	60	29	T-RCR246029HLG2	3,285
24	66	29	T-RCR246629HLG2	3,305
24	72	29	T-RCR247229HLG2	3,326
30	42	29	T-RCR304229HLG2	3,087
30	48	29	T-RCR304829HLG2	3,285
30	54	29	T-RCR305429HLG2	3,310
30	60	29	T-RCR306029HLG2	3,336
30	66	29	T-RCR306629HLG2	3,360
30	72	29	T-RCR307229HLG2	3,386



Specify	Notes
<ul style="list-style-type: none"> • Laminate Selection for Worksurface • Color Selection for Edge • Color Selection for Base - Black, Metallic Silver or Satin White 	<ul style="list-style-type: none"> • Features a 3-stage table base. • Dimensions shown for Height Adjustable Tables are the nominal sizes. • Actual sizes will be smaller to provide a 1" perimeter gap required for safety. • Height adjustable tables available on glides only.

E SERIES 2MM EDGE RECTANGULAR TABLES WITH HEIGHT ADJUSTABLE BASES


D	W	H	Model Number	List
24	42	29	T-RCR244229HG	2,799
24	48	29	T-RCR244829HG	2,950
24	54	29	T-RCR245429HG	3,005
24	60	29	T-RCR246029HG	3,024
24	66	29	T-RCR246629HG	3,045
24	72	29	T-RCR247229HG	3,066
30	42	29	T-RCR304229HG	2,827
30	48	29	T-RCR304829HG	3,024
30	54	29	T-RCR305429HG	3,050
30	60	29	T-RCR306029HG	3,075
30	66	29	T-RCR306629HG	3,102
30	72	29	T-RCR307229HG	3,126



Specify	Notes
<ul style="list-style-type: none"> • Laminate Selection for Worksurface • Color Selection for Edge 	<ul style="list-style-type: none"> • Features a 2-stage table base. • Dimensions shown for Height Adjustable Tables are the nominal sizes. • Actual sizes will be smaller to provide a 1" perimeter gap required for safety. • Height adjustable tables available on glides only. • Available in Metallic Silver.

DAY-TO-DAY 2MM EDGE ROUND TABLES WITH STEEL X-BASES

D	H	Model Number	List
36	29	T-RDR3629SXG	1,328




Specify	Notes
<ul style="list-style-type: none"> • Laminate Selection for Worksurface • Color Selection for Edge • Color Selection for Base 	

Grommet Specifications


RECTANGULAR GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1	+38
C	Location 2	+38
D	Location 3	+38
E	Locations 2 and 3	+76
F	Locations 1, 2 and 3	+114
G	Locations 1 and 2	+76
H	Locations 1 and 3	+76




CORNER GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1 (Default)	-
C	Location 1 and 2	+38
D	Location 1 and 3	+38
E	Locations 1, 2 and 3	+76

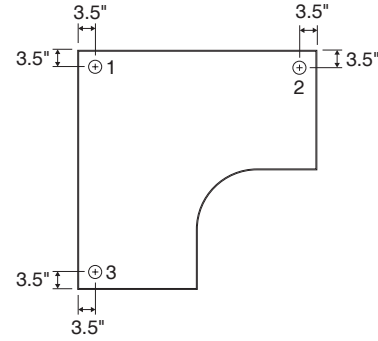

RECTANGULAR GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1	+38




Rectangular and Curvilinear Corner Worksurfaces

24" DEEP RECTANGULAR WORKSURFACES

D	W	Model Number	List
24	24	W-WS2424	354
24	30	W-WS2430	423
24	36	W-WS2436	461
24	42	W-WS2442	501
24	48	W-WS2448	544
24	54	W-WS2454	605
24	60	W-WS2460	666
24	66	W-WS2466	758
24	72	W-WS2472	829

30" DEEP RECTANGULAR WORKSURFACES

D	W	Model Number	List
30	24	W-WS3024	423
30	30	W-WS3030	498
30	36	W-WS3036	543
30	42	W-WS3042	642
30	48	W-WS3048	696
30	54	W-WS3054	807
30	60	W-WS3060	807
30	66	W-WS3066	911
30	72	W-WS3072	991



Specify

Notes



- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)
- Worksurface support hardware is specified separately.
- Grommet holes with covers are specified as options.
- It is highly recommended that a center support be used on all worksurfaces greater than 48" width.
- When spanning panel connections with a worksurface greater than 48" wide, an additional center cantilever is recommended for added support. Otherwise, a U-channel is recommended for additional center worksurface support.
- It is not recommended that 36", 42" and 48" deep worksurfaces be cantilevered to panels.
- If these size depths must be panel hung, it is highly recommended that an additional front support, such as a combination leg or full laminate support panel, also be specified.
- Worksurfaces have a thickness of 1 1/8".

CURVILINEAR CORNER TYPE A

D ¹	W ¹	Model Number	List
24	36	W-WSCC2436	765
30	42	W-WSCC3042	1,018

STANDARD CURVILINEAR CORNER TYPE B

D ¹	W ¹	Model Number	List
24	42	W-WSCC2442	924
24	48	W-WSCC2448	1,021
30	48	W-WSCC3048	1,164



Specify

Notes

- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)
- Worksurface support hardware is specified separately.
- Rear corner grommet hole with cover is included.
- Additional grommet holes with covers are specified as options.
- Worksurfaces have a thickness of 1 1/8".



Divi Bullpen Surfaces

24" DEEP DIVI BULLPEN SURFACES

D	W	Number of Panels	Model Number	List
24	24 1/8	1	W-WSDV2424	380
24	30 1/8	1	W-WSDV2430	445
24	36 1/8	1	W-WSDV2436	485
24	42 1/8	1	W-WSDV2442	526
24	48 1/8	1	W-WSDV2448	567
24	54 1/4	2	W-WSDV2454	693
24	60 1/8	1	W-WSDV2460A	693
24	60 1/4	2	W-WSDV2460B	693
24	66 1/4	2	W-WSDV2466	783
24	72 1/4	2	W-WSDV2472A	850
24	72 3/8	3	W-WSDV2472B	850
24	78 1/4	2	W-WSDV2478A	911
24	78 3/8	3	W-WSDV2478B	911
24	84 1/4	2	W-WSDV2484A	972
24	84 3/8	3	W-WSDV2484B	972

30" DEEP DIVI BULLPEN SURFACES

D	W	Number of Panels	Model Number	List
30	24 1/8	1	W-WSDV3024	445
30	30 1/8	1	W-WSDV3030	524
30	36 1/8	1	W-WSDV3036	584
30	42 1/8	1	W-WSDV3042	665
30	48 1/8	1	W-WSDV3048	715
30	54 1/4	2	W-WSDV3054	835
30	60 1/8	1	W-WSDV3060A	835
30	60 1/4	2	W-WSDV3060B	835
30	66 1/4	2	W-WSDV3066	937
30	72 1/4	2	W-WSDV3072A	1,019
30	72 3/8	3	W-WSDV3072B	1,019
30	78 1/4	2	W-WSDV3078A	1,228
30	78 3/8	3	W-WSDV3078B	1,228
30	84 1/4	2	W-WSDV3084A	1,422
30	84 3/8	3	W-WSDV3084B	1,422



Specify

- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)


Notes

- Worksurface support hardware is specified separately.
- Grommet holes with covers are specified as options.
- Bullpen Rectangular surfaces are designed to compensate for the gap created by natural panel creep for system specific (MWall or Divi) panels only.
- It is highly recommended that a center support be used on all workspaces greater than 48" wide.
- When spanning panel connections with a worksurface greater than 48" wide, an additional center cantilever is recommended for added support.
- Otherwise a U-Channel is recommended for additional center worksurface support.

Rectangular Worksurfaces for Height Adjustable Tables

RECTANGULAR WORKSURFACES FOR HEIGHT ADJUSTABLE TABLES

D¹	W¹	Model Number	List
23	46	W-WS2346	544
23	52	W-WS2352	629
23	58	W-WS2358	666
23	64	W-WS2364	758
23	70	W-WS2370	829
29	46	W-WS2946	696
29	52	W-WS2952	714
29	58	W-WS2958	807
29	64	W-WS2964	911
29	70	W-WS2970	991




Specify	Notes
<ul style="list-style-type: none"> • Laminate Selection • Color Selection for 2mm Edge • Grommet Location • Color Selection for Grommet Cover 	<ul style="list-style-type: none"> • Rectangular Worksurfaces for Height Adjustable Tables have a 1 1/8" thickness. • Height adjustable worksurface support base is specified separately. • Grommet holes with covers are specified as options. • These worksurfaces are for use with height adjustable table bases only. • Worksurfaces for Height Adjustable Tables require a 1" gap around to prevent pinch points. • See example in Product Details.


Height Adjustable Table Bases

DAY-TO-DAY ELECTRIC HEIGHT ADJUSTABLE TABLE BASES

Surface W	Surface D	Color	Model Number	List
48" - 72"	24"	Black	WFS-2L-3S24B	2,666
48" - 72"	24"	Metallic Silver	WFS-2L-3S24S	2,666
48" - 72"	24"	Satin White	WFS-2L-3S24W	2,666
48" - 72"	30"	Black	WFS-2L-3S30B	2,666
48" - 72"	30"	Metallic Silver	WFS-2L-3S30S	2,666
48" - 72"	30"	Satin White	WFS-2L-3S30W	2,666



Lowered




Raised

Notes

- 3-stage Day-to-Day Height Adjustable Table Bases allow for quick and easy adjustment of worksurface height.
- Available in black, satin white or metallic silver.
- Bases do not include worksurfaces.
- Adjusts from 21.54"H to 47.80"H (without surface).
- Tops should accommodate a 1 in (25mm) pinch clearance on all sides.
- Maximum worktop overhead allowed is 6" on one side.
- Weight capacity is 250lbs (incl. worksurface) for two leg and 350lbs (incl. work-surface) for three leg.
- Base width may be adjusted from 42"W to 72"W.
- 4 memory presets.
- Select tops to avoid cable shearing, prevent pinch points and collisions. Assure attached screens or monitor arms do not create unstable conditions.
- Local compliances should meet local requirements.

E SERIES ELECTRIC HEIGHT ADJUSTABLE TABLE BASES

Surface W	Surface D	Color	Model Number	List
42" - 72"	24"	Metallic Silver	T-RB2L2S24	2,407
42" - 72"	30"	Metallic Silver	T-RB2L2S30	2,407




Notes

- 2-stage E Series Electric Height Adjustable Table Bases on Glides allow for quick and easy adjustment of worksurface height.
- Available in metallic silver.
- Bases do not include worksurfaces.
- Adjusts from 26.26"H to 45.94"H (without surface).
- Tops should accommodate a 1 in (25mm) pinch clearance on all sides.
- Maximum worktop overhead allowed is 6" on one side.
- Weight capacity is 250lbs (incl. worksurface).
- Base width may be adjusted from 42"W to 72"W. 4 memory presets. Select tops to avoid cable shearing, prevent pinch points and collisions. Assure attached screens or monitor arms do not create unstable conditions.
- Local compliances should meet local requirements.


Panel Mounted A-Legs

DIVI PANEL MOUNTED A-LEGS				
H	D	Left Hand	Right Hand	List
		Model Number	Model Number	
27	12	WFS-ALW2712DVL	WFS-ALW2712DVR	435
27	24	WFS-ALW2724DVL	WFS-ALW2724DVR	495
27	30	WFS-ALW2730DVL	WFS-ALW2730DVR	528


SHARED DIVI PANEL MOUNTED A-LEGS				
H	D	Left Hand Shared	Right Hand Shared	List
		Model Number	Model Number	
27	12	WFS-ALW2712DVLS	WFS-ALW2712DVRS	467
27	24	WFS-ALW2724DVLS	WFS-ALW2724DVRS	528
27	30	WFS-ALW2730DVLS	WFS-ALW2730DVRS	561




Left Hand



Right Hand



Left Hand Shared




Right Hand Shared

Specify


- Paint Selection (+25 for Grade C)

Notes


- **Important:** A-Legs cannot be used as freestanding table support. One side must be anchored to a storage element or panel.
- A-Legs are constructed from 1 x 2 painted steel.
- Legs have 1 1/2" leveling glides.
- A-Leg welded construction allows for attachment to the worksurface.
- Ships installed with panel attachment brackets. Panel locking bracket for panel attachment situations ships separate.




EXAMPLE 1 - UNSTABLE
32"H Structural Wing




EXAMPLE 2 - UNSTABLE
32"H Panel with Cantilever




EXAMPLE 3 - UNSTABLE
32"H Panel with Cantilevers



EXAMPLE 1 - STABLE
Standard Structural Wing



EXAMPLE 2 - STABLE
32"H Panel with Floor Support




EXAMPLE 3 - STABLE
32"H Panel with Panel Mounted A-Legs

N-Legs, Combination Legs and Pedestal-to-Panel Attachment Brackets

2.5 X 2.5 POST N-LEG

H	D	Model Number	List
27	24	WFS-NL22724	589
27	30	WFS-NL22730	598



Specify **Notes**

- Paint Selection

PEDESTAL-TO-PANEL ATTACHMENT BRACKET

Model Number	List
S-DVMPMB	238



Specify **Notes**

- Paint Selection
- Pedestal-to-Panel Attachment Brackets attach structural pedestals to panels.
- These brackets serve as a space filler and as a way to add stability to panels.
- Pedestal to panel attachment brackets may only be used when the nominal surface depth matches the nominal pedestal depth (24" Deep surface & 24" deep pedestal or 30" deep surface and 30" deep pedestal).

COMBINATION SUPPORT LEGS

Model Number	List
WFS-LEG	408




Specify **Notes**

- Style Selection - Black or Brushed Steel
- Combination Support Leg is available in black or brushed steel.
- With a unique set of adapters, legs can be converted from standard peninsula legs to equal height mobile legs, extended mobile legs, nesting legs, or extended height legs.
- Standard legs are sold in a kit with one 24 3/4" leg (black or brushed steel), one 2 11/16" extender and one 7/16" high glide with 1" of adjustment.
- Standard legs can be converted to mobile legs and back with the same base leg unit.
- Casters are ordered separately.
- Extender, glide and caster are always black.
- Legs ship disassembled and flat.

Cantilevers, Side Support/Rear Brackets, Flat Plates and U-Channels

STANDARD CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List
24	18	Left	WPS-UNCT24L	94
24	18	Right	WPS-UNCT24R	94
24	18	Pair	WPS-UNCT24P	182
30	25.5	Left	WPS-UNCT30L	182
30	25.5	Right	WPS-UNCT30R	182
30	25.5	Pair	WPS-UNCT30P	361




Notes

- Standard Cantilevers provide cantilevered worksurface support from panel or wall track at either the left or right hand side of a worksurface.
- All worksurface support components fasten directly to worksurfaces with screws.
- Standard cantilevers may also be used as a center support.
- Cantilevers are painted black as a standard.
- It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge

SHARED CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List
24	18	Single	WPS-UNCT24S	135
24	18	Pair	WPS-UNCT24SP	266
30	25.5	Single	WPS-UNCT30S	266
30	25.5	Pair	WPS-UNCT30SP	534




Notes

- Shared Cantilevers provide cantilevered support from panel or wall track at the seam between two worksurfaces.
- All worksurface support components fasten directly to worksurfaces with screws.
- Shared Cantilevers are painted black as a standard.
- It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge.

SIDE SUPPORT / REAR BRACKETS

Hand	Model Number	List
Left	WPS-SSSAL	69
Right	WPS-SSSAR	69
Pair	WPS-SSSA	132



Notes

- Side Support / Rear Brackets provide direct support from panel or wall track along the short side of rectangular worksurface or at rear of corner worksurface.
- All worksurface support components fasten directly to worksurfaces with screws.
- Side Support / Rear Brackets are painted black as a standard.
- Available in black only.

FLAT PLATES & U-CHANNELS

Item	Model Number	List
Flat Plate	WPS-FP	32
U-Channel	WPS-VC48	129



Notes

- Flat Plate is used to splice two worksurfaces together at front edge.
- The 3.5" x 1.5" plate has four holes per side for superior adaptability and rigidity.
- It is recommended that flat plates are also specified at the front edge helping splice the two worksurfaces together.
- Flat Plates are painted black as a standard.
- U-Channel mounts to underside of longer worksurfaces to provide bracing where center support cantilever is not possible.
- All worksurface support components fasten directly to worksurfaces with screws.
- U-Channels are painted black as a standard.


Clip Screen Product Details

Note: AIS Screens are designed to be easily installed in most industry standard situations, however, it is the responsibility of the dealer to understand the installation methods required as well as limitations of the situation or product that you intend to install on.


Screen installation instructions can be found at : <https://www.ais-inc.com/resources/installation-instructions>

The following information only pertains to AIS product.

Clip Screen Product Details



1/4" Clear Glass



3/8" Clear Glass

- Available in 1/4" clear glass and 3/8" clear glass.
- Screens come with all necessary mounting hardware (clips, channel, feet, brackets, etc) at prices shown.
- Clip dimensions: 2 1/8" H , 2 1/3" W and 1 1/2" D.
- Screens mounted to surfaces will receive 2 clips for surfaces 24" – 54" wide, 3 clips for surfaces 60" – 72" wide and 4 clips for surfaces 78" – 84" wide.
- Surface Mount screens screw directly to top of panels.
- Divi specific Panel Top Screens can only be applied to Divi product. For Panel Top Screens that can be used with other systems, please see the Clear & PET Screens price list.
- Standard in Metallic Silver.

Glass Material

- AIS Glass is standard with polished edges and straight corners.
- AIS Glass is standard tempered glass with standard iron content. Request samples from literature center.
- Standard products for glass are always clear unless noted otherwise, other colors may be available upon special request (upcharges apply).
- Glass is easily cleaned with common janitorial supplies.
- 1/4" Glass weighs 2.88 lbs per square foot.
- 3/8" Glass weighs 4.32 lbs per square foot

Glass 1/4" Panel Top Surface Mount Clip Screens


Material	Where Used	Screen Type	Sized For	Mount Type
Lexan 1/4"	Panel Top	Channel	Divi Panel Dimensions	Surface Mount
Lexan 3/8"		Clip		
Glass 1/4"		Lite		
Glass 3/8"				

GLASS 1/4" PANEL TOP SURFACE MOUNT CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
12	24	Y-3P3B1U1224B	529
12	30	Y-3P3B1U1230B	542
12	36	Y-3P3B1U1236B	549
12	42	Y-3P3B1U1242B	578
12	48	Y-3P3B1U1248B	607
12	54	Y-3P3B1U1254B	619
12	60	Y-3P3B1U1260B	666
12	66	Y-3P3B1U1266B	695
12	72	Y-3P3B1U1272B	724
12	78	Y-3P3B1U1278B	753
12	84	Y-3P3B1U1284B	779
16	24	Y-3P3B1U1624B	616
16	30	Y-3P3B1U1630B	659
16	36	Y-3P3B1U1636B	695
16	42	Y-3P3B1U1642B	756
16	48	Y-3P3B1U1648B	789
16	54	Y-3P3B1U1654B	840
16	60	Y-3P3B1U1660B	887
16	66	Y-3P3B1U1666B	899
16	72	Y-3P3B1U1672B	920
16	78	Y-3P3B1U1678B	937
16	84	Y-3P3B1U1684B	954

GLASS 1/4" PANEL TOP SURFACE MOUNT CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
20	24	Y-3P3B1U2024B	661
20	30	Y-3P3B1U2030B	687
20	36	Y-3P3B1U2036B	727
20	42	Y-3P3B1U2042B	765
20	48	Y-3P3B1U2048B	816
20	54	Y-3P3B1U2054B	869
20	60	Y-3P3B1U2060B	922
20	66	Y-3P3B1U2066B	975
20	72	Y-3P3B1U2072B	1,028
20	78	Y-3P3B1U2078B	1,082
20	84	Y-3P3B1U2084B	1,133
24	24	Y-3P3B1U2424B	647
24	30	Y-3P3B1U2430B	710
24	36	Y-3P3B1U2436B	773
24	42	Y-3P3B1U2442B	834
24	48	Y-3P3B1U2448B	897
24	54	Y-3P3B1U2454B	958
24	60	Y-3P3B1U2460B	1,021
24	66	Y-3P3B1U2466B	1,085
24	72	Y-3P3B1U2472B	1,145
24	78	Y-3P3B1U2478B	1,206
24	84	Y-3P3B1U2484B	1,267




24 - 54 Wide




60 - 72 Wide



78 - 84 Wide



On Panel Top



Surface Mount Clip

Specify

• Paint Selection

Notes

- For use with Divi only. See Clear & PET Screens price list for Panel Top Screens that can be used on non-Divi panels.
- Clips available in Metallic Silver only.
- Standard products for glass are always clear unless noted otherwise, other colors may be available upon special request (upcharges apply).

Class 3/8" Panel Top Surface Mount Clip Screens


Material	Where Used	Screen Type	Sized For	Mount Type
Lexan 1/4"	Panel Top	Channel	Divi Panel Dimensions	Surface Mount
Lexan 3/8"		Clip		
Glass 1/4"		Lite		
Glass 3/8"				

GLASS 3/8" PANEL TOP SURFACE MOUNT CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
12	24	Y-4P3B1U1224B	718
12	30	Y-4P3B1U1230B	722
12	36	Y-4P3B1U1236B	786
12	42	Y-4P3B1U1242B	848
12	48	Y-4P3B1U1248B	914
12	54	Y-4P3B1U1254B	979
12	60	Y-4P3B1U1260B	1,045
12	66	Y-4P3B1U1266B	1,109
12	72	Y-4P3B1U1272B	1,173
12	78	Y-4P3B1U1278B	1,239
12	84	Y-4P3B1U1284B	1,304
16	24	Y-4P3B1U1624B	684
16	30	Y-4P3B1U1630B	764
16	36	Y-4P3B1U1636B	801
16	42	Y-4P3B1U1642B	891
16	48	Y-4P3B1U1648B	988
16	54	Y-4P3B1U1654B	1,056
16	60	Y-4P3B1U1660B	1,087
16	66	Y-4P3B1U1666B	1,184
16	72	Y-4P3B1U1672B	1,258
16	78	Y-4P3B1U1678B	1,280
16	84	Y-4P3B1U1684B	1,344

GLASS 3/8" PANEL TOP SURFACE MOUNT CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
20	24	Y-4P3B1U2024B	780
20	30	Y-4P3B1U2030B	884
20	36	Y-4P3B1U2036B	984
20	42	Y-4P3B1U2042B	1,086
20	48	Y-4P3B1U2048B	1,184
20	54	Y-4P3B1U2054B	1,287
20	60	Y-4P3B1U2060B	1,387
20	66	Y-4P3B1U2066B	1,489
20	72	Y-4P3B1U2072B	1,587
20	78	Y-4P3B1U2078B	1,687
20	84	Y-4P3B1U2084B	1,788
24	24	Y-4P3B1U2424B	855
24	30	Y-4P3B1U2430B	975
24	36	Y-4P3B1U2436B	1,093
24	42	Y-4P3B1U2442B	1,212
24	48	Y-4P3B1U2448B	1,331
24	54	Y-4P3B1U2454B	1,450
24	60	Y-4P3B1U2460B	1,571
24	66	Y-4P3B1U2466B	1,690
24	72	Y-4P3B1U2472B	1,807
24	78	Y-4P3B1U2478B	1,925
24	84	Y-4P3B1U2484B	2,044




24 - 54 Wide




60 - 72 Wide



78 - 84 Wide



On Panel Top



Surface Mount Clip

Specify

• Paint Selection


Notes

- For use with Divi only. See Clear & PET Screens price list for Panel Top Screens that can be used on non-Divi panels.
- Clips available in Metallic Silver only.
- Standard products for glass are always clear unless noted otherwise, other colors may be available upon special request (upcharges apply).

Mid-Height Shelf and Flipper Doors Units

LINEAR MID-HEIGHT SHELF UNITS


H	W	D	Model Number	List
7.75	30	12	S-SHFLDV30	315
7.75	36	12	S-SHFLDV36	326
7.75	42	12	S-SHFLDV42	345
7.75	48	12	S-SHFLDV48	382
7.75	60	12	S-SHFLDV60	402



Specify	Notes
<ul style="list-style-type: none"> • Paint Selection 	<ul style="list-style-type: none"> • Linear Mid-Height Shelf Units provide low profile overhead storage. • Shelf ends have locking swing cams to prevent dislodgement. • Shelf bottom will receive task lights. • Unit includes two Linear Mid-height shelf ends, one shelf pan, and mounting hardware. • Order shelf unit that corresponds to panel width.

METAL / FABRIC DOOR FRONT TYPE C FLIPPER DOOR UNIT

Interior H	W	Interior D	Model Number	List
14.25	30	12	S-FDUDV30	801
14.25	36	12	S-FDUDV36	828
14.25	42	12	S-FDUDV42	844
14.25	48	12	S-FDUDV48	899
14.25	60	12	S-FDUDV60	1,089




Specify	Notes
<ul style="list-style-type: none"> • Paint Selection 	<ul style="list-style-type: none"> • Type C Flipper Door Unit - Metal Door Front provides binder height, lockable overhead storage. • Door opens and stores above top cover pan. • Flipper unit has an open back. • Shelf ends have locking swing cams to prevent dislodgement. • Shelf bottom will receive task lights. • All flipper doors are lockable with two supplied keys. • Order flipper unit that corresponds to panel width.

L Series Pedestals


L SERIES STRUCTURAL BOX-BOX-FILE PEDESTALS

Surface D	Actual D	Model Number	List
24	22	S-PEDBBFJ24	1,072
30	28	S-PEDBBFJ30	1,514



L SERIES STRUCTURAL FILE-FILE PEDESTALS

Surface D	Actual D	Model Number	List
24	22	S-PEDFFJ24	1,072
30	28	S-PEDFFJ30	1,514



Specify

- Paint Selection


Notes

- L Series Structural Pedestals have a square front with rectangular pulls.
- Box drawers and file drawers have full depth, smooth riding ball bearing suspensions.
- All pedestals are lockable with two supplied keys.
- Lock cores are removable with lock removal keys. Master keys are also available.
- Extra lock core sets are available for keying pedestals alike.
- Pedestals come equipped for front to back letter-sized filing.
- Box-box-file pedestals include one box drawer pencil tray.
- Adjustable height is 27 1/2" to 29".

L Series Pedestals


L SERIES MOBILE BOX-FILE PEDESTALS

Surface D	Actual D	Model Number	List
24	22	S-PEDBFMJ24V2	1,288




L SERIES MOBILE BOX-FILE PEDESTALS WITH CUSHION

Surface D	Actual D	Model Number	List
24	22	S-PEDBFMJ24V2	1,706




12" WIDE L SERIES MOBILE BOX-FILE PEDESTALS

D	W	Model Number	List
24	12	S-PEDBFJ1224	854



12" WIDE L SERIES MOBILE BOX-FILE PEDESTALS WITH CUSHION

D	W	Model Number	List
24	12	S-PEDBFMJ1224	1,141



Specify

Notes


- Paint Selection
- Fabric Selection for Pedestal Cushion (Miradaor Upholstery only)

- L Series Mobile Pedestals have a square front with rectangular pulls.
- Box drawers and file drawers have full depth, smooth riding ball bearing suspensions.
- Mobile pedestals include counterweights that are field installed.
- All pedestals are lockable with two supplied keys.
- Lock cores are removable with lock removal keys. Master keys are also available.
- Extra lock core sets are available for keying pedestals alike.
- Pedestals come equipped for front to back letter-sized filing, 12" wide pedestals come equipped for side-to-side filing.
- Finished height of pedestal is 21 3/8" (box-file).
- Finished height of pedestal with cushion is 23 5/8.
- Pedestal cushion can be upholstered in Mirador upholstery fabric only.

L Series Laterals and Replacement Pulls

METAL FRONT L SERIES 2-DRAWER LATERAL FILES

Min H.	Actual W	Actual D	Model Number	List
27 1/2	30	18	S-LATJJ2D30	1,884
27 1/2	36	18	S-LATJJ2D36	2,019




REPLACEMENT PULLS


Type	Model Number	List
Silver Loop Pull	X-HAND-LOOPS	27
Silver Bar Pull	X-HAND-BARS	27
Rectangular Pull	X-HAND-RPS	27



Loop Pull



Bar Pull



Rectangular Pull

Specify

- Paint Selection

Notes

- L Series 2-Drawer Lateral files have full width to align with pedestals.
- File drawers have full depth, smooth riding ball bearing suspensions.
- All laterals are lockable with two supplied keys.
- Laterals accommodate letter, A4, and Legal sized filing and include front to back conversion bars for each drawer.
- Standard with rectangular pull.


Notes

- Replacements only.
- Pulls work for all metal and laminate storage units with the exception of roll out/pantry towers.
- For replacement handles for roll out/pantry towers use only bar pull.

Task Lights and Task Light Cord Managers

OVERHEAD LED TASK LIGHTS

Length	Model Number	List
24	A-LEDTL-61024	511
40	A-LEDTL-61540	758



Notes

- LED task lights are 1-1/4" wide, and 3/8" in thickness and come in 24 and 40 inch lengths.
- Brushed aluminum with black trim.
- Attachable to the underside of overhead cabinet via the built-in magnets, or mounted to non-metal surfaces using the adjustable mounting bracket.
- Feature 100 lm/w with warm white and white color temps and convenient one-touch On/Off and Touch-and-Hold dimmer.
- Power-in and power-switch are reversible.
- Power cord is 10' in length.

TASK LIGHT CORD MANAGERS

H	Model Number	List
3	A-DVWMTL03	58
11	A-DVWMTL11	67
16	A-DVWMTL16	81




Notes

- Task Light Cord Managers engage to panel hanger frame slots.
- Managers are available in three heights: 3", 11" and 16".
- Use 16" to achieve a full height finished aesthetic for managing task light cords under full height shelves, flipper doors, or under half height shelves hung level with full height shelves on 65"/66"/67" high panels.
- Use 11" to achieve a full height finished aesthetic for managing task light cords under half height shelves on 50" high panels.
- Use 3" for managing cords above tackboards or double them up for any of the above situations when a full height manager is not required.
- Task Light cord managers are black only to match task light cords and are non-handed for use on either the left or right side of a panel.
- Hanger frames can accommodate only one task light cord manager and will not fit behind tackboards.
- Cord managers are painted black as standard.

Monitor Arms

SINGLE MONITOR ARM

Model Number	List
A-ERSMASB	805




Notes

- Suitable for 10" - 28" size range LCD screens.
- Load capacity of 19lbs per arm.
- Features 180 degree rotation at the mounting base and extension.
- VESA monitor mount for 75mm and 100mm standard.
- Available mounting options include c-clamp, grommet or bolt through.
- Available in silver only.
- Single monitor arm features a snap-in/removable cord clip for wire management.

DUAL MONITOR ARM

Model Number	List
A-ERDMASB	1,479




Notes

- Suitable for 10" - 28" size range LCD screens.
- Load capacity of 19lbs per arm.
- Features 180 degree rotation at the mounting base and extension.
- VESA monitor mount for 75mm and 100mm standard.
- Available mounting options include c-clamp, grommet or bolt through.
- Available in silver only.
- Single monitor arm features a snap-in/removable cord clip for wire management.

DUAL MONITOR ARM FOR SHALLOW DEPTH WORKSURFACES

Model Number	List
A-ERDMAM9	1,479




Notes

- Suitable for LCD screens up to 27".
- Load capacity of 14.3 lbs. per monitor.
- Features 180 degree rotation at the mounting base and extension.
- Monitors mount with M4 screws to a VESA bracket.
- VESA monitor mount for 75mm and 100mm standard.
- Mounts with c-clamp on the table edge or through a grommet hole.
- Available in silver only.

Keyboard Arms, Mouse Trays, Pencil Drawers and Anti-Fatigue Mats

STANDARD EXTENDED KEYBOARD ARM

Model Number	List
A-KEYBZE	1,032




Notes

- Keyboard Arm / Trays mount to underside of worksurfaces to support standard computer keyboards.
- Keyboard platform area behind wrist rest measures 8 1/2" deep x 20" wide.
- All keyboard trays include a factory mounted, synthetic leather wrist rest.

STANDARD MOUSE TRAY

Model Number	List
A-MSETS	182




Notes

- Mouse Tray mounts to either the left or right side of keyboard tray platform with screws to service both left and right handed users.
- Mouse tray has standard mouse pad surface and requires no additional mouse pad.
- Mouse area measures 7 1/4" x 7 1/4".
- Mouse tray swivels around vertical axis 270° and has 30° of tilt around the horizontal axis (15° above keyboard tray plane to 15° below plane, independent of keyboard tray tilt).
- Order mouse tray separately.

PENCIL DRAWER

H	W	D	Model Number	List
2 1/4	21 1/4	16 1/4	A-PDRWP	265




Notes

- Pencil Drawer provides convenient, low profile storage of loose items.
- Constructed of rigid, durable PVC with black textured finish.
- Plastic slides mount underneath worksurfaces with screws provided.
- Pencil drawer measures 16 1/4" deep x 21 1/4" wide x 2 1/4" high.
- Note: Plan pencil drawer location around worksurface support elements.

ANTI-FATIGUE MAT

W	D	Thickness	Model Number	List
34	20	3/4	A-HF342075	216




Notes

- Custom blended medium density polyurethane foam.
- High tear strength polyurethane outer membrane.
- Available in black only.

Tackboards, Lock Cores and Keys

TACKBOARDS

H	W	Model Number	List
12	24	A-TACKDV1224	255
12	30	A-TACKDV1230	270
12	36	A-TACKDV1236	282
12	42	A-TACKDV1242	296
12	48	A-TACKDV1248	316
12	60	A-TACKDV1260	412
15	24	A-TACKDV1524	260
15	30	A-TACKDV1530	277
15	36	A-TACKDV1536	286
15	42	A-TACKDV1542	306
15	48	A-TACKDV1548	321
15	60	A-TACKDV1560	422
19	24	A-TACKDV1924	332
19	30	A-TACKDV1930	354
19	36	A-TACKDV1936	370
19	42	A-TACKDV1942	390
19	48	A-TACKDV1948	412
19	60	A-TACKDV1960	441



Specify


- Fabric Selection

Notes

- Tackboards are 7/8" thick and mount to wall track to provide vertical tackable surface for wall track applications and private offices.
- Tackboards are available in three different heights.

LOCK CORES AND KEYS

Key Type	Model Number	List
Core with 2 keys	S-W1CORE1	20
Core with 2 keys (set of 2 keyed alike)	S-W1CORE2	32
Core with 2 keys (set of 3 keyed alike)	S-W1CORE3	49
Core with 2 keys (set of 4 keyed alike)	S-W1CORE4	63
Core with 2 keys (set of 5 keyed alike)	S-W1CORE5	79
Core with 2 keys (set of 6 keyed alike)	S-W1CORE6	92
Core with 2 keys (set of 7 keyed alike)	S-W1CORE7	107
Core with 2 keys (set of 8 keyed alike)	S-W1CORE8	124
Core with 2 keys (set of 9 keyed alike)	S-W1CORE9	138
Core with 2 keys (set of 10 keyed alike)	S-W1CORE10	153
Master Key	RS-W1MKEY	15
Core Removal Key	RS-W1CRKEY	15
Replacement Key	RS-WK ___ (Key Number)	22



Notes

- Lock Cores & Keys are included with all AIS storage files and overhead flipper units, but may be ordered separately for keying stations alike or for replacement purposes.
- Keys and Lock Cores are available in #'s 226 through 425.
- When ordering keyed alike sets, be sure to also order an LL core removal key.
- The core removal key is needed to remove the existing core from the lock housing in order to replace with a new core.
- Order sets based on quantity of storage items to be keyed alike.

Task Chairs

BOLTON MID-BACK TASK CHAIR

Description	Model Number	List	Lumbar Support
Mid-Back Mesh Task Chair	4471	664	+36
Adjustable Lumbar Support	4400LUMBAR	44	-



Without Adjustable Lumbar Support



With Adjustable Lumbar Support

Weight: 32 lbs. Width: 26 Depth: 24 Height: 36.75 - 40.75 Seat Height: 17 - 21
Arm Height: 7.5 - 10 Seat Depth: 17 - 21

Notes

- The Bolton Mid-Back Task Chair, a full featured task chair, has the versatility to fit any space. From the executive office to the front office, Bolton provides comfort and elegance with its thoughtful design.
- Bolton is highly versatile allowing users to choose the right configuration for their size, shape and tasks at hand.
- Synchro-tilt motion, adjustable seat height, height adjustable arms (1D arms), seat depth adjustment, tilt tension adjustment and upright back lock allow the user to fine-tune Bolton to their personal preference.
- Bolton ships ready to assemble.
- Upholstered with black mesh on the back and black seat fabric.
- Optional adjustable lumbar support available.
- Use 4400LUMBAR for adjustable lumbar support replacement.

DEVENS TASK CHAIR

Description	Model Number	List
Devens Black Task Chair	4600	831
Devens Grey Task Chair	4630	933



Devens Black Task Chair



Devens Grey Task Chair

Weight: 35 lbs. Width: 27 Depth: 26 Height: 37 - 41.75 Seat Height: 16.75 - 21.5
Seat Depth: 16.75 - 18.75 Seat Width: 19 Arm Height: 6.75 - 10.5 Lumbar Apex Height: 8 - 10

Notes

- The user friendly Devens with uncompromised comfort offers clean lines, outstanding fit and finish all resulting in a sophisticated and understated task chair at an outstanding price point.
- Seat height, seat depth, adjustable lumbar support and 4D arm adjustability along with a multiple position back lock allow the user to fine-tune Devens for their size and shape, tasks at hand and preference.
- Devens is equipped with an advanced automatic tension weight activated synchro-tilt mechanism.
- Upholstered with black mesh back and black seat fabric or graphite mesh back and grey seat fabric.
- Devens is BIFMA compliant and rated for users up to 300 pounds.
- Devens ships ready to assemble.
- Devens has a 24/7 10-year warranty.

Side Chairs

REVERE MESH BACK TASK CHAIR

Description	Model Number	List
Mesh Back Task Chair	5400	480



Weight: 38 lbs. Width: 25.75 Depth: 26 Height: 37 Seat Height: 15.4 - 18.6
 Seat Depth: 18.56 Arm Height: 8.5 - 12.3 Lumbar Apex Height: 8.25

Notes

- Revere seating with uncompromised comfort offers proper adjustability and robust construction at an outstanding price point.
- Features include tension adjustment, height adjustable seat, height adjustable arms, height adjustable lumbar support and upright back lock allowing the user to fine-tune Revere for optimal comfort and usability.
- Revere is available with a standard black seat and black mesh back.
- Revere is rated for users up to 300 pounds and is shipped ready to assemble.

PAXTON SIDE CHAIR

Description	Model Number	List
Side Chair on Glides	3400	304



Weight: 15 lbs. Width: 23 Depth: 21 Height: 32 Seat Height: 18
 Seat Depth: 17.5 Seat Width: 18 Arm Height: 9 Lumbar Apex Height: 9


Notes

- Paxton, a perfect companion to the Bolton chair, is a stackable mesh back side chair with soft edges.
- It's thoughtfully designed seat cushion offers comfort and support.
- The lightweight side chair is ideally suited for use in cafeteria, training spaces, classrooms, waiting rooms, auditoriums or any area where extra seating is required.
- Paxton can also be used as a cost-effective side or guest chair.
- Paxton ships ready to assemble.

Volker Cubes

STANDARD VOLKER CUBE

H	W	D	Model Number	Grade A List
18	18	18	F-CUBE181818	697



Specify

Notes

- Fabric Selection (Mirador Upholstery only)
- The Volker Cube can be easily and discretely tucked away when not in use, or effortlessly pulled out when ready to use.
- The Volker Cube features a sleek design with the upholstery fabric of choice to complete the design of your workspace.
- The cube features hubless casters allowing for ease of motion as well as adding an attractive design element.
- Volker Cubes can be upholstered in Mirador upholstery fabric only.



National Showrooms:

Leominster

AIS Headquarters
25 Tucker Drive
Leominster, MA 01453

Chicago

The Merchandise Mart
Suite 1086
Chicago, Illinois 60654

New York

AIS New York
257 Park Avenue South
New York, New York 10010

Washington, D.C.

AIS Washington, D.C.
1501 M St, NW, STE 230
Washington, D.C. 20005

GSA Sales

GSA Contract 47QSM20D08Q4
Multiple Award Schedule (MAS)
Large Category: Furniture & Furnishings
Subcategories: Office Furniture, Packaged
Office Furniture and Furniture Services

For additional information on AIS:

Dealer Showrooms, Representative
Directory, Project Case Studies, Online
Catalog & Product Showcase
Visit: www.ais-inc.com